

MSP430 Advanced Technical Conference 2006



RF Basics, RF for Non-RF Engineers

Dag Grini
Program Manager, Low Power Wireless
Texas Instruments

Technology for Innovators™



Agenda

- Basics
- Basic Building Blocks of an RF System
- RF Parameters and RF Measurement Equipment
- Support / getting started


© 2006 Texas Instruments Inc, Slide 2

Technology for Innovators™



Definitions

- **dBm** – relative to 1 mW
- **dBc** – relative to carrier
- 10mW = 10dBm, 0dBm = 1mW
- -110dBm = $1\text{E-}11\text{mW} = 0.00001\text{nW}$
- For a 50 ohm load :
-110dBm is 0.7 μV ,
i.e. not much!
- **Rule of thumb:**
 - Double the power = 3 dB increase
 - Half the power = 3 dB decrease

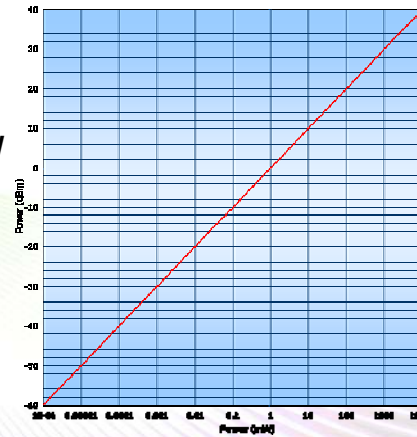

© 2006 Texas Instruments Inc, Slide 3

Technology for Innovators™

TEXAS INSTRUMENTS

dBm to Watt

• About dBm and W

- | | | |
|-----------------|---------------------------------|-------------------------------|
| ▪ Voltage Ratio | $aV = 20 \log (P2/P1)$ | $[aV] = \text{dB}$ |
| ▪ Power Ratio | $aP = 10 \log (P2/P1)$ | $[aP] = \text{dB}$ |
| ▪ Voltage Level | $V' = 20 \log (V/1\mu\text{V})$ | $[V'] = \text{dB}\mu\text{V}$ |
| ▪ Power Level | $P' = 10 \log (P/1\text{mW})$ | $[P'] = \text{dBm}$ |


e.g. 25mW max. allowed radiated power in the EU SRD band
 $\gg P' = 10 \log (25\text{mW}/1\text{mW}) = 10 * 1,39794 \text{ dBm} \gg 14 \text{ dBm}$

© 2006 Texas Instruments Inc, Slide 4

Technology for Innovators™

TEXAS INSTRUMENTS

Electromagnetic Spectrum

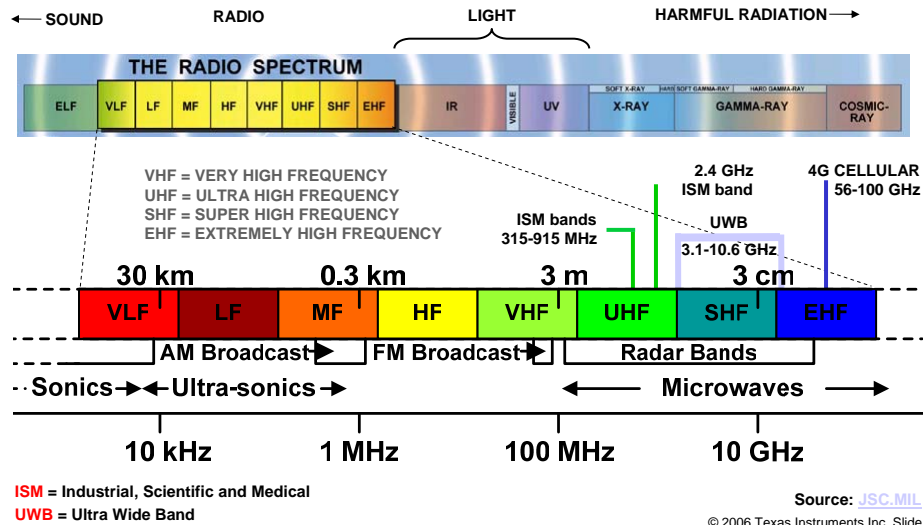

Technology for Innovators™

TEXAS INSTRUMENTS

Frequency Spectrum Allocation

• Unlicensed ISM/SRD bands:

• USA/Canada:

- 260 – 470 MHz (FCC Part 15.231; 15.205)
- 902 – 928 MHz (FCC Part 15.247; 15.249)
- 2400 – 2483.5 MHz (FCC Part 15.247; 15.249)

• Europe:

- 433.050 – 434.790 MHz (ETSI EN 300 220)
- 863.0 – 870.0 MHz (ETSI EN 300 220)
- 2400 – 2483.5 MHz (ETSI EN 300 440 or ETSI EN 300 328)

• Japan:

- 315 MHz (Ultra low power applications)
- 426-430, 449, 469 MHz (ARIB STD-T67)
- 2400 – 2483.5 MHz (ARIB STD-T66)
- 2471 – 2497 MHz (ARIB RCR STD-33)


- ISM = Industrial, Scientific and Medical
- SRD = Short Range Devices

© 2006 Texas Instruments Inc, Slide 6

Technology for Innovators™

TEXAS INSTRUMENTS

ISM/SRD License-Free Frequency Bands

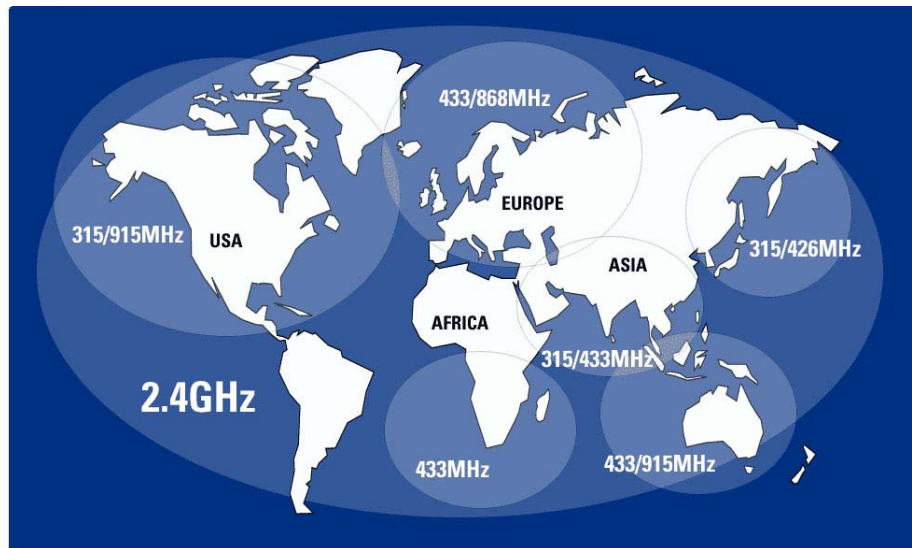

© 2006 Texas Instruments Inc, Slide 7


Technology for Innovators™

TEXAS INSTRUMENTS

RF Communication Systems

• Simplex RF System

- A radio technology that allows only one-way communication from a transmitter to a receiver
- Examples: FM radio, Pagers, TV, One-way AMR systems

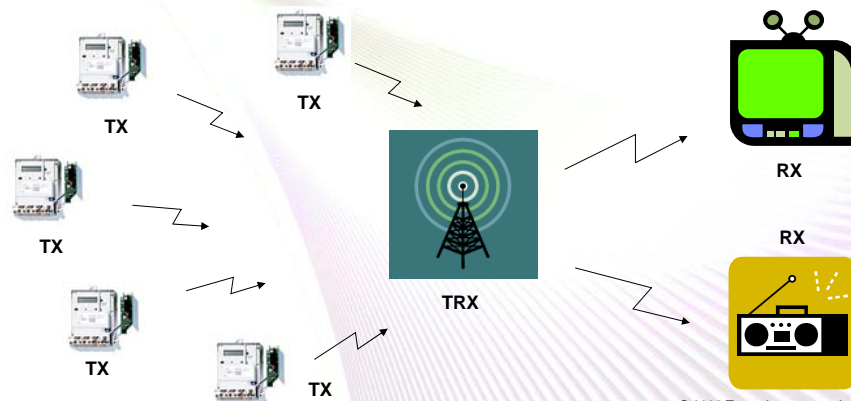

© 2006 Texas Instruments Inc, Slide 8

Technology for Innovators™

TEXAS INSTRUMENTS

RF Communication Systems

- **Half-duplex RF Systems**

- Operation mode of a radio communication system in which each end can transmit and receive, but not simultaneously.
- **Note:** The communication is bidirectional over the same frequency, but unidirectional for the duration of a message. The devices need to be transceivers. Applies to most TDD and TDMA systems.
- Examples: Walkie-talkie, wireless keyboard mouse



© 2006 Texas Instruments Inc, Slide 9

Technology for Innovators™

TEXAS INSTRUMENTS

RF Communication Systems

- **Full-duplex RF Systems**

- Radio systems in which each end can transmit and receive simultaneously
- Typically two frequencies are used to set up the communication channel. Each frequency is used solely for either transmitting or receiving. Applies to Frequency Division Duplex (FDD) systems.
- Example: Cellular phones, satellite communication



© 2006 Texas Instruments Inc, Slide 10

Technology for Innovators™

TEXAS INSTRUMENTS

Agenda


- Basics
- Basic Building Blocks of an RF System
- RF Parameters and RF Measurement Equipment
- Support / getting started

© 2006 Texas Instruments Inc, Slide 11

Technology for Innovators™

TEXAS INSTRUMENTS

Wireless Communication Systems

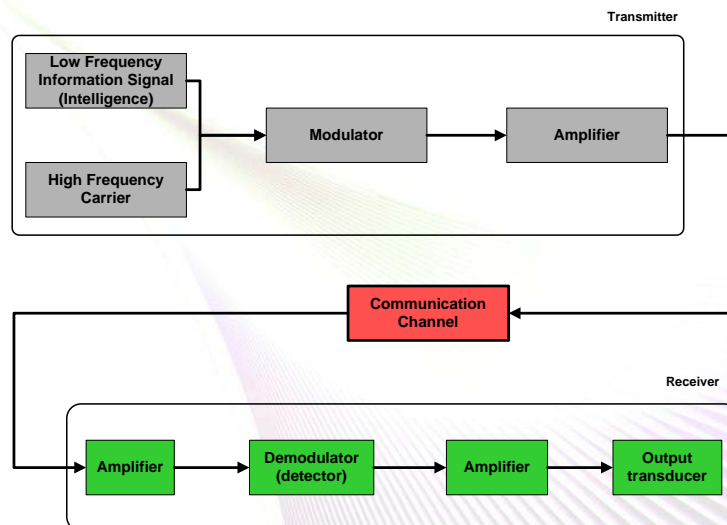


© 2006 Texas Instruments Inc, Slide 12

Technology for Innovators™

TEXAS INSTRUMENTS

Modulation and Demodulation

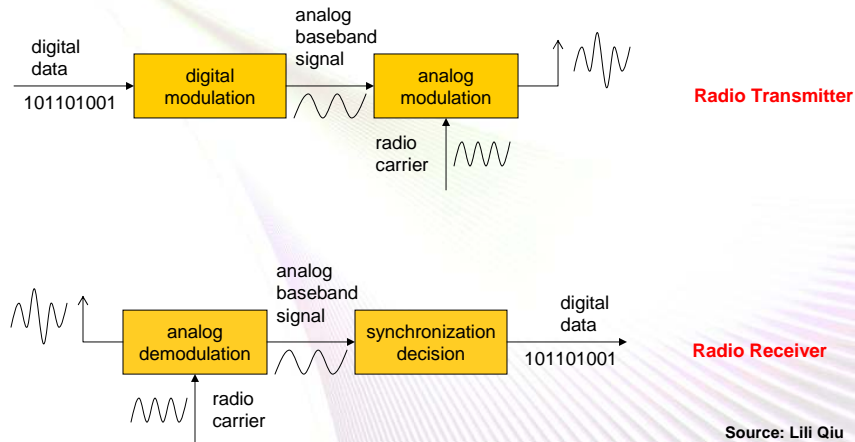

Source: Lili Qiu

© 2006 Texas Instruments Inc, Slide 13

Technology for Innovators™

TEXAS INSTRUMENTS

Modulation Methods

- **Starting point:**
we have a low frequency signal and want to send it at a high frequency
- **Modulation:** The process of superimposing a low frequency signal onto a high frequency signal
- **Three modulation schemes available:**
 1. **Amplitude Modulation (AM):** the amplitude of the carrier varies in accordance to the information signal
 2. **Frequency Modulation (FM):** the frequency of the carrier varies in accordance to the information signal
 3. **Phase Modulation (PM):** the phase of the carrier varies in accordance to the information signal


© 2006 Texas Instruments Inc, Slide 14

Technology for Innovators™

TEXAS INSTRUMENTS

Digital Modulation

- Modulation of digital signals is known as **Shift Keying**
- **Amplitude Shift Keying (ASK):**
 - Pros: simple
 - Cons: susceptible to noise
 - Example: Many legacy wireless systems, e.g. AMR

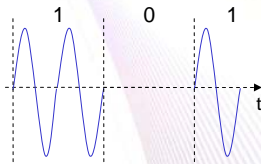

Source: Lili Qiu


© 2006 Texas Instruments Inc, Slide 15

Technology for Innovators™

TEXAS INSTRUMENTS

Digital Modulation

- **Frequency Shift Keying (FSK):**
 - Pros: less susceptible to noise
 - Cons: theoretically requires larger bandwidth/bit than ASK
 - Popular in modern systems
 - Gaussian FSK (GFSK), e.g. used in Bluetooth, has better spectral density than 2-FSK modulation, i.e. more bandwidth efficient

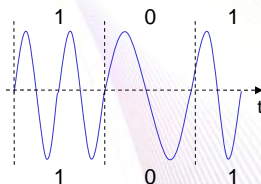

Source: Lili Qiu

© 2006 Texas Instruments Inc, Slide 16


Technology for Innovators™

TEXAS INSTRUMENTS

Digital Modulation

• Phase Shift Keying (PSK):

- Pros:
 - Less susceptible to noise
 - Bandwidth efficient
- Cons:
 - Require synchronization in frequency and phase → complicates receivers and transmitter
- Example: IEEE 802.15.4 / ZigBee

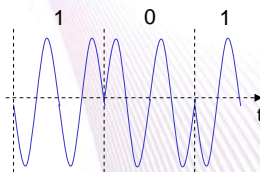

Source: Lili Qiu


© 2006 Texas Instruments Inc, Slide 17

Technology for Innovators™

TEXAS INSTRUMENTS

Basic Building Blocks of an RF System

- RF-IC
 - Transmitter
 - Receiver
 - Transceiver
 - System-on-Chip (SoC); typically transceiver with integrated microcontroller
- Crystal
 - Reference frequency for the LO and the carrier frequency
- Balun
 - **Balanced to unbalanced**
 - Converts a differential signal to a single-ended signal or vice versa
- Matching
- Filter
 - Used if needed to pass regulatory requirements / improve selectivity
- Antenna

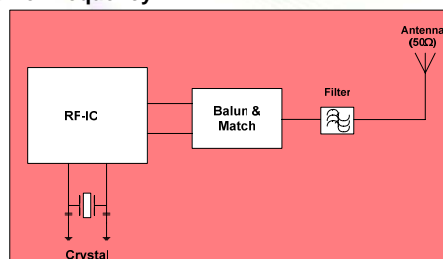


© 2006 Texas Instruments Inc, Slide 18

Technology for Innovators™

TEXAS INSTRUMENTS

Transmitter

- Modern transmitters typically use fractional-N synthesizers
- For angle modulation like FSK, MSK, O-QPSK, the synthesizer frequency is adjusted
- For amplitude modulation like OOK and ASK, the amplifier level is adjusted

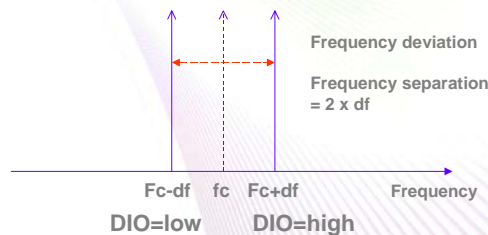

FSK modulation


© 2006 Texas Instruments Inc, Slide 19

Technology for Innovators™

TEXAS INSTRUMENTS

Receiver Architecture

- **Super heterodyne receiver** – e.g. CC1000
 - Converts the incoming signal to an **Intermediate Frequency (IF)** signal and performs:
 1. **Carrier frequency tuning** – selects desired signal
 2. **Filtering** – separates signal from other modulated signals picked up
 3. **Amplification** – compensates for transmission losses in the signal path

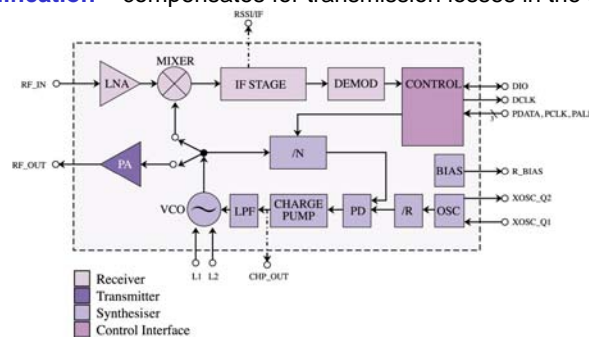

© 2006 Texas Instruments Inc, Slide 20


Technology for Innovators™

TEXAS INSTRUMENTS

Receiver Architecture

- **Image rejection receiver** – e.g. CC1020

- The **image frequency** is an undesired input frequency that is capable of producing the same intermediate frequency (IF) as the desired input frequency produces

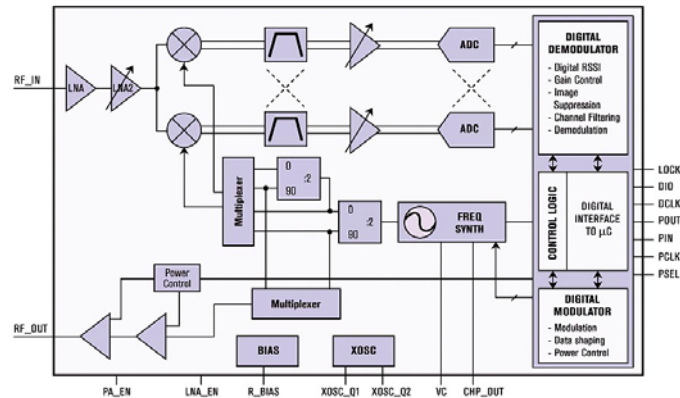

© 2006 Texas Instruments Inc, Slide 21

Technology for Innovators™

TEXAS INSTRUMENTS

Crystals

- Provides reference frequency for Local Oscillator (LO) and the carrier frequency

- **Various types:**

- Low Power crystals (32.768 kHz)
 - Used with sleep modes on e.g. System-on-Chips
- Crystals
 - Thru hole
 - Tuning fork
 - SMD
- Temperature Controlled Crystal Oscillators (TCXO)
 - Temperature stability – some narrowband applications
- Voltage Controlled Crystal Oscillators (VCXO)
- Oven Controlled Crystal Oscillators (OCXO)
 - Extremely stable




© 2006 Texas Instruments Inc, Slide 22


Technology for Innovators™

TEXAS INSTRUMENTS

Balun & Matching

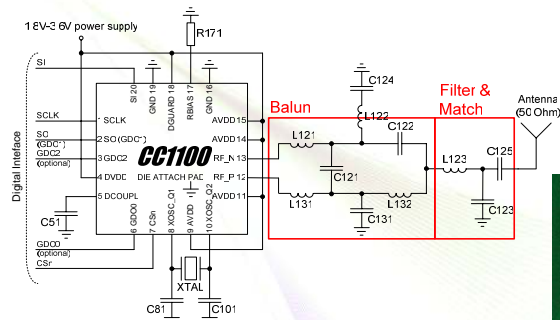

Differential signal out of the chip

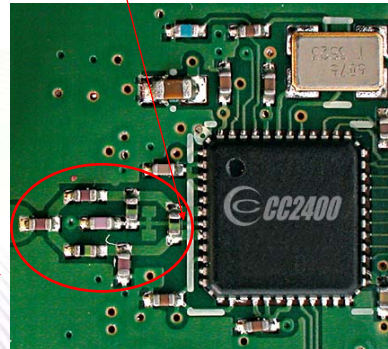

Single ended signal

Balun and matching towards antenna

© 2006 Texas Instruments Inc, Slide 23

Technology for Innovators™


TEXAS INSTRUMENTS

Antennas

Commonly used antennas:

- **PCB antennas**

- Little extra cost (PCB)
- Size demanding at low frequencies
- Good performance possible
- Complicated to make good designs

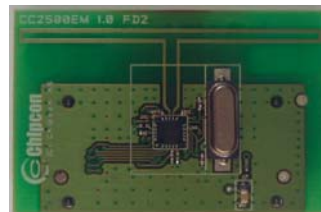

- **Whip antennas**

- Expensive (unless piece of wire)
- Good performance
- Hard to fit in many applications



- **Chip antennas**

- Expensive
- OK performance



© 2006 Texas Instruments Inc, Slide 24

Technology for Innovators™

TEXAS INSTRUMENTS

Antennas

- The antenna is VERY important if long range is important
- A quarter wave antenna is an easy and good solution, but it is not small (433 MHz: 16.4 cm, 868 MHz: 8.2 cm)
 - You can “curl up” such an antenna and make a helical antenna. This is often a good solution since it utilizes unused volume for a product.
- If you need long range and have limited space, then talk to an antenna expert !


© 2006 Texas Instruments Inc, Slide 25

Technology for Innovators™

TEXAS INSTRUMENTS

Extending the Range of an RF System

1. Increase the Output power
 - Add an external Power Amplifier (PA)
2. Increase the sensitivity
 - Add an external Low Noise Amplifier (LNA)
3. Increase both output power and sensitivity
 - Add PA and LNA
4. Use high gain antennas
 - Regulatory requirements need to be followed

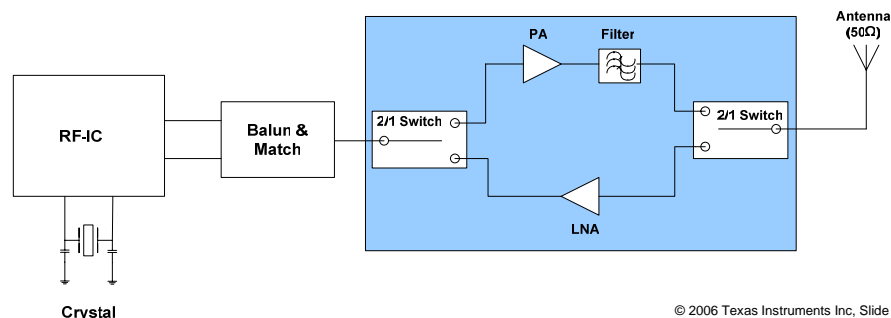

© 2006 Texas Instruments Inc, Slide 26



Technology for Innovators™

TEXAS INSTRUMENTS

Adding an External PA

CC2420EM PA DESIGN

- Signal from TXRX_Switch pin level shifted and buffered
 - Level in TX: 1.8 V, level for RX and all other modes: 0V
- CMOS and GaAs FET switches assures low RX current c
- Simpler control without external LNA
 - No extra signal is needed from MCU to turn off LNA in low power

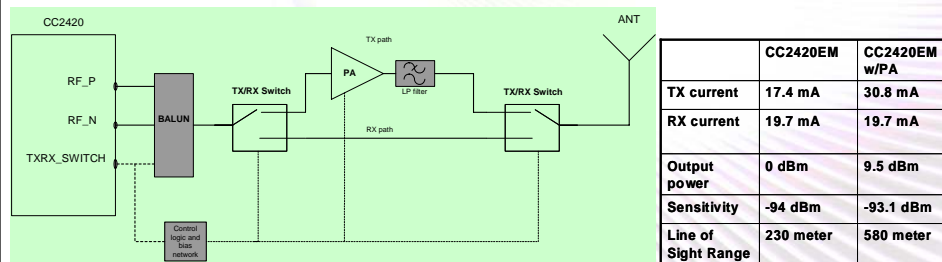

© 2006 Texas Instruments Inc, Slide 27

Technology for Innovators™

TEXAS INSTRUMENTS

Radio Range – Free Space Propagation

- How much loss can we have between TX and RX?
- **Friis' transmission equation** for free space propagation:

$$P_r = P_t + G_t + G_r + 20 \log \left(\frac{\lambda}{4\pi} \right) - 20 \log d \quad \text{or} \quad P_r = \frac{P_t G_t G_r \lambda^2}{(4\pi)^2 d^2}$$

- P_t is the transmitted power, P_r is the received power
- G_t is the transmitter, G_r is the receiver antenna gain
- λ is the wavelength
- D is the distance between transmitter and receiver, or the range

© 2006 Texas Instruments Inc, Slide 28

Technology for Innovators™

TEXAS INSTRUMENTS

Radio Range – "real life"

- How much loss can we really have TX to RX?
- 120 dB **link budget** at 433 MHz gives approximately 2000 meters (Chipcon rule of thumb)
- Based on the emperical results above and Friis' equation estimates on real range can be made:
- **Rule of Thumb:**
 - 6 dB improvement ~ twice the distance
 - Double the frequency ~ half the range
 - 433 MHz longer range than 868 MHz

© 2006 Texas Instruments Inc, Slide 29

Technology for Innovators™

 TEXAS INSTRUMENTS

Radio Range – Important Factors

- **Factors**
 - Antenna (gain, sensitivity to body effects etc.)
 - Sensitivity
 - Output power
 - Radio pollution (selectivity, blocking, IP3)
 - Environment (Line of sight, obstructions, reflections, multipath fading)

© 2006 Texas Instruments Inc, Slide 30

Technology for Innovators™

 TEXAS INSTRUMENTS

Agenda


- Basics
- Basic Building Blocks of an RF System
- RF Parameters and RF Measurement Equipment
- Support / getting started

© 2006 Texas Instruments Inc, Slide 31


Technology for Innovators™

TEXAS INSTRUMENTS

Phase Noise

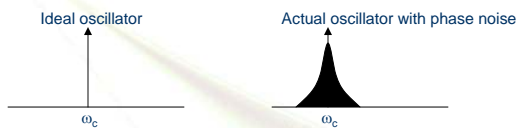

Down Conversion (receivers):

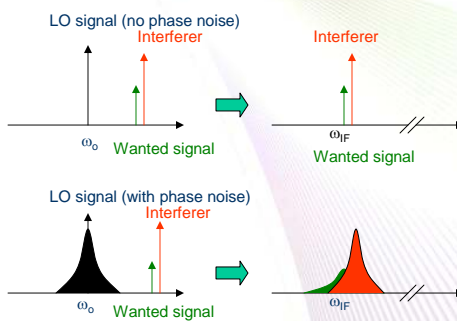

Down-converted bands consist of two overlapping spectra, with the wanted signal suffering from significant noise due to the tail of the interferer

Interferer end up within the IF bandwidth and **cannot** be filtered out

© 2006 Texas Instruments Inc, Slide 32


Technology for Innovators™

TEXAS INSTRUMENTS

Phase Noise

Transmitters:

Nearby transmitter



Ideal oscillator

Difficult to detect weak signal at ω_2

The wanted signal is corrupted by the phase noise tail of the transmitter

- Phase noise is a key parameter for transceivers
- CC1020: -90 dBc/Hz @ 12.5 kHz (narrowband)


© 2006 Texas Instruments Inc, Slide 33

Technology for Innovators™

TEXAS INSTRUMENTS

Narrowband Transmitter

- How good is the transmitter at making efficient use of the RF spectrum?
- **OBW = Occupied Band Width**
 - Defined as BW with 99.5% of the total average power (ARIB)
 - For 12.5 kHz channel spacing OBW < 8.5 kHz (ARIB)
 - Measured using built-in function of spectrum analyzer

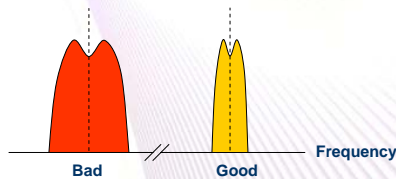

© 2006 Texas Instruments Inc, Slide 34


Technology for Innovators™

TEXAS INSTRUMENTS

Narrowband Transmitter

- **ACP = Adjacent Channel Power**

- 25 kHz channel spacing, 17 kHz BW
- 12.5 kHz channel spacing, 8.5 kHz BW
- Measured using built-in function of spectrum analyzer

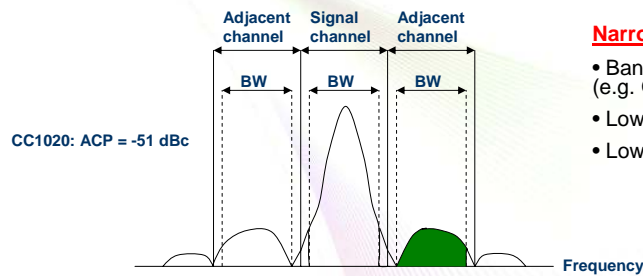

Narrowband characteristics:

- Bandwidth efficient modulation (e.g. GFSK)
- Low data rate
- Low deviation

- **Low phase noise** ➡ key parameter for low ACP
- **ETSI: Absolute ACP requirement (dBm), ARIB: Relative (dBc)**


© 2006 Texas Instruments Inc, Slide 35

Technology for Innovators™

TEXAS INSTRUMENTS

Receiver, Co-channel Rejection

- How good is the receiver at handling interferers at same frequency?
- **Co-channel rejection, CC1020/CC1021 : -11dB**
- **Test method: Modulated interferer**
 - Wanted signal 3 dB above sensitivity limit

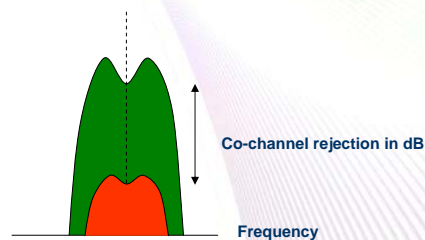


© 2006 Texas Instruments Inc, Slide 36

Technology for Innovators™

TEXAS INSTRUMENTS

Receiver Selectivity

- ACR = Adjacent Channel Rejection or
- ACS = Adjacent Channel Selectivity

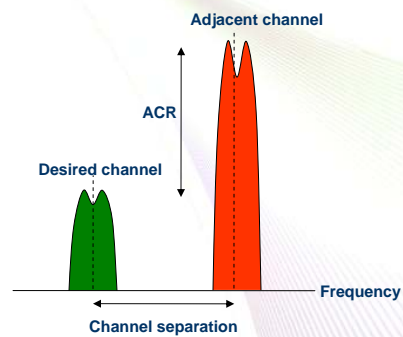

- CC1020: 32dB @ 12.5 kHz
- Test method
 - Wanted 3dB above sensitivity level
 - Interferer injected in the adjacent channel


© 2006 Texas Instruments Inc, Slide 37

Technology for Innovators™

TEXAS INSTRUMENTS

Receiver Selectivity

- Selectivity, measured for channels “further out” (alternate channel selectivity)
- Same test method as ACR/ACS

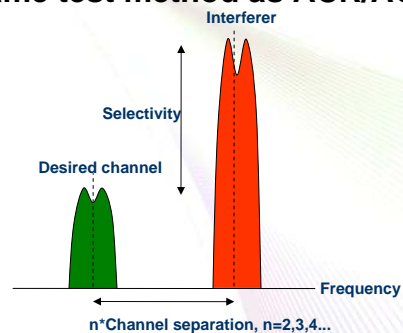

- Low phase noise and narrow IF bandwidth
 ➡ good ACR/ACS

© 2006 Texas Instruments Inc, Slide 38

Technology for Innovators™

TEXAS INSTRUMENTS

Receiver Selectivity

| Selectivity Requirement for different RF standards | | | |
|--|--------------------------------|------------------------------|-----------------------------|
| Standard, Ch. Spacing | Adjacent Channel Rejection | Selectivity, other channels | |
| ARIB, 12.5 kHz | 30 dB ($\pm 12.5\text{kHz}$) | 40 dB for all other channel | |
| ARIB, 25 kHz | 40 dB ($\pm 25\text{kHz}$) | 40 dB for all other channel | |
| ETSI class 1, 25 kHz | 60 dB ($\pm 25\text{kHz}$) | 84 dB ($\pm 1\text{MHz}$) | |
| Bluetooth, 1 MHz | 0 dB ($\pm 1\text{MHz}$) | 30 dB ($\pm 2\text{MHz}$) | 40 dB ($\pm 3\text{MHz}$) |
| CC2400, 1 MHz (250kbit/s) | 12 dB ($\pm 1\text{MHz}$) | 48 dB ($\pm 2\text{MHz}$) | 50 dB ($\pm 3\text{MHz}$) |
| CC2400, 1 MHz (1Mbit/s) | 0 dB ($\pm 1\text{MHz}$) | 20 dB ($\pm 2\text{MHz}$) | 41dB ($\pm 3\text{MHz}$) |
| Zigbee (802.15.4), 5 MHz | 0 dB ($\pm 5\text{MHz}$) | 30 dB for all other channels | |
| CC2420, 5MHz | 39/46 ($\pm 5\text{MHz}$) | 53/57 ($\pm 10\text{MHz}$) | |

- CC1020 is ARIB compliant (12.5 and 25 kHz channels)

© 2006 Texas Instruments Inc, Slide 39

Technology for Innovators™



Receiver, Blocking/desensitization

- **Blocking/desensitization** is a measure of how good a receiver is to reject an interferer “far away” (out of band) from the wanted signal
- Measured the same way as selectivity, but the interfering signal is usually not modulated
- CC1020 performance:
 - 1 MHz 60 dB
 - 2 MHz 70 dB
 - 10 MHz 78 dB
- Blocking can be further improved with a SAW filter


© 2006 Texas Instruments Inc, Slide 40

Technology for Innovators™





Image Rejection

- Image Rejection

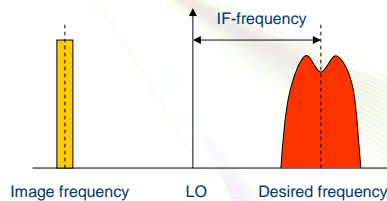

- **CC1000**
 - No image rejection
- **CC1020**
 - Image rejection



© 2006 Texas Instruments Inc, Slide 41

Technology for Innovators™

TEXAS INSTRUMENTS

Receiver Sensitivity



- How to achieve good RF sensitivity?

- Introduce high gain in front of the receiver

- External LNA needed
- Poor linearity (IP3)
- Poor blocking/selectivity
- “Removes” the losses in the SAW filter

- Lower noise bandwidth (narrowband)

- Blocking/linearity not changed
- Good selectivity
- Good frequency control needed

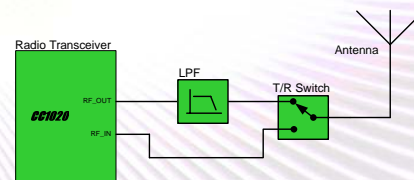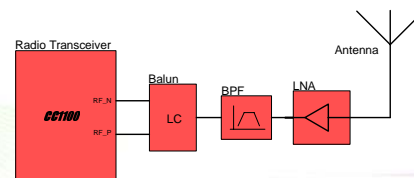

© 2006 Texas Instruments Inc, Slide 42

Technology for Innovators™

TEXAS INSTRUMENTS

RF Measurement Equipment

- **Vector Network Analyzers**
 - Component Characterisation – insertion loss
 - S-parameters - matching
- **Spectrum Analyzers**
 - Output Power, harmonics, spurious emission
 - Phase Noise
 - ACP
 - OBW
 - Modulation - deviation
- **Signal Generators**
 - Sensitivity (BER option needed)
 - Selectivity/blocking
 - Two-tone measurements – IP3
- **Power Meters**
 - Output Power – calibration
- **Oscilloscopes**
 - Digital signal analysis
- **Function and Arbitrary Waveform Generators**




© 2006 Texas Instruments Inc, Slide 43

Technology for Innovators™

TEXAS INSTRUMENTS

2.4 GHz ISM-band devices

- Due to the world-wide availability of the 2.4GHz ISM band it is getting more crowded day by day
- Devices such as Wi-Fi, Bluetooth, ZigBee, cordless phones, microwave ovens, wireless game pads, toys, PC peripherals, wireless audio devices and many more occupy the 2.4 GHz frequency band

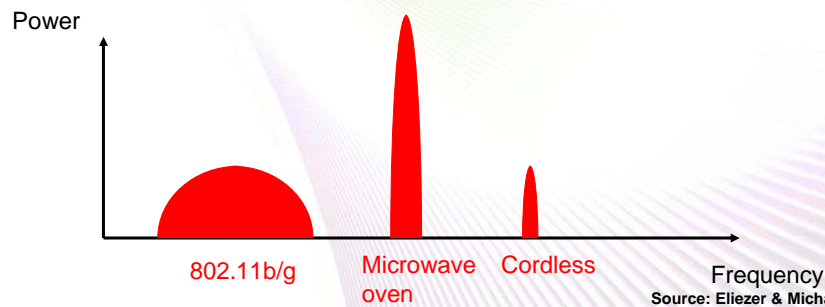

Source: Eliezer & Michael, TI

© 2006 Texas Instruments Inc, Slide 44

Technology for Innovators™

TEXAS INSTRUMENTS

Spread Spectrum Systems


- Data sent using spread spectrum is intentionally spread over a wide frequency range
- Appears as noise, so it is difficult to detect and jam
- Resistant to noise and interference thus increasing the probability that the signal will be received correctly
- Unlikely to interfere with other signals even if they are transmitted on the same frequency
- 2 types of Spread Spectrum common in ISM bands:
 - Direct Sequence Spread Spectrum (DSSS)
 - Frequency Hopping Spread Spectrum (FHSS)

© 2006 Texas Instruments Inc, Slide 45

Technology for Innovators™

TEXAS INSTRUMENTS

General Model of a Spread Spectrum System

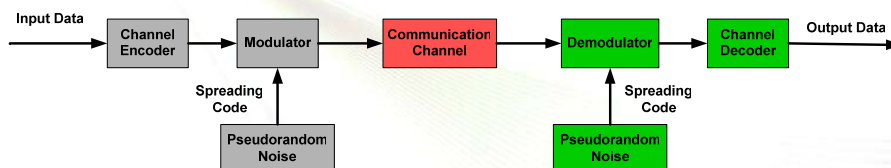



© 2006 Texas Instruments Inc, Slide 46

Technology for Innovators™

TEXAS INSTRUMENTS

Direct Sequence Spread Spectrum

- Each bit represented by multiple bits using spreading code
- Spreading code spreads signal across wider frequency band
- Good resistance against interferers



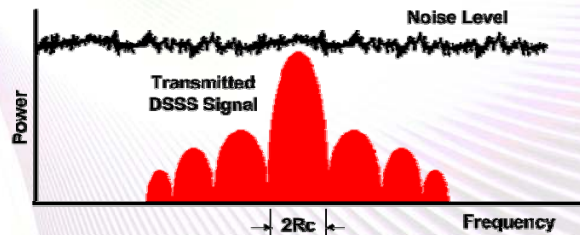
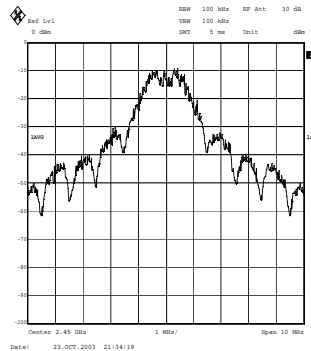


© 2006 Texas Instruments Inc, Slide 47

Technology for Innovators™

TEXAS INSTRUMENTS

DSSS – BPSK Example

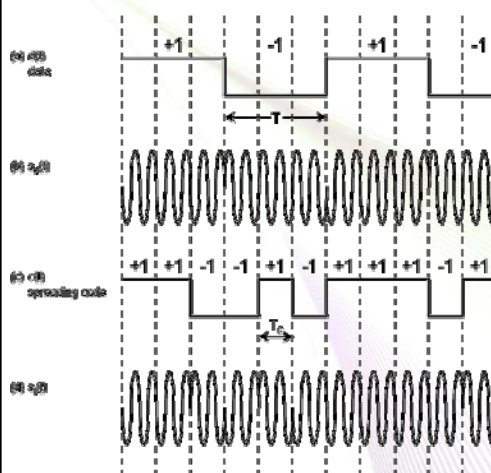

Source: William Stallings
 © 2006 Texas Instruments Inc, Slide 48

Technology for Innovators™

TEXAS INSTRUMENTS

DSSS Spreading Mechanism

IEEE 802.15.4 (CC2420): 2 Mcips/s -> 250 kbps data rate

- 4 bits (nibble) are coded into 32 chips using a look-up table

- RX correlation example:

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|-------------------|----|----|----|
| Correct chip sequence for nibble = 5: | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 0 1 1 1 0 1 1 0 1 0 1 0 0 0 0 1 0 1 1 1 0 1 1 0 1 1 0 0 1 1 1 0 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Incoming chip sequence (value is 5, but with 8 faulty chips): | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 1 1 1 0 1 1 1 1 0 0 0 0 0 0 1 0 0 1 1 0 0 0 1 0 0 1 1 1 1 0 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Nibble value | Comparison (XOR) with all possible chip sequences | | | | | | | | | | | | | | | | | | | | | | | | | | Correlation value | | | |
| 0 | 1 | 1 | 0 | 1 | 1 | 0 | 1 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 1 | 0 | 0 | 0 | 1 | 0 | 0 | 1 | 1 | 0 | 18 | |
| 1 | 1 | 1 | 0 | 1 | 1 | 0 | 1 | 1 | 0 | 1 | 1 | 1 | 0 | 0 | 0 | 1 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 16 | |
| 2 | 0 | 0 | 1 | 0 | 1 | 1 | 0 | 1 | 1 | 0 | 1 | 1 | 0 | 0 | 1 | 1 | 1 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 1 | 0 | 0 | 1 | 0 | 14 |
| 3 | 0 | 0 | 1 | 0 | 0 | 1 | 0 | 1 | 1 | 1 | 0 | 1 | 0 | 1 | 1 | 0 | 1 | 1 | 0 | 0 | 1 | 1 | 1 | 0 | 0 | 1 | 0 | 1 | 0 | 12 |
| 4 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 1 | 1 | 1 | 0 | 0 | 1 | 1 | 0 | 1 | 1 | 0 | 0 | 1 | 1 | 1 | 0 | 0 | 0 | 1 | 1 | 1 | 14 |
| 5 | 0 | 0 | 1 | 1 | 0 | 1 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 1 | 1 | 0 | 1 | 1 | 0 | 1 | 1 | 0 | 1 | 0 | 0 | 1 | 0 | 0 | 24 | |
| 6 | 1 | 1 | 0 | 0 | 0 | 0 | 1 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 1 | 1 | 0 | 1 | 1 | 0 | 1 | 0 | 1 | 0 | 0 | 16 | |
| 7 | 1 | 0 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 1 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 14 | |
| 8 | 1 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 1 | 0 | 0 | 1 | 0 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 0 | 1 | 1 | 0 | 1 | 14 | |
| 9 | 1 | 0 | 1 | 1 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 1 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 0 | 1 | 1 | 0 | 1 | 16 | | |
| 10 | 0 | 1 | 1 | 1 | 0 | 1 | 1 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 1 | 0 | 1 | 1 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 1 | 1 | 14 | | |
| 11 | 0 | 1 | 1 | 0 | 1 | 1 | 1 | 0 | 1 | 1 | 1 | 0 | 0 | 1 | 0 | 1 | 0 | 0 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 20 | | |
| 12 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 0 | 1 | 1 | 1 | 0 | 1 | 1 | 0 | 0 | 1 | 1 | 0 | 0 | 1 | 0 | 1 | 0 | 1 | 1 | 0 | 14 | | |
| 13 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 0 | 1 | 1 | 1 | 0 | 1 | 1 | 0 | 0 | 1 | 1 | 0 | 0 | 0 | 1 | 0 | 12 | | |
| 14 | 1 | 0 | 0 | 1 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 1 | 1 | 0 | 1 | 1 | 1 | 1 | 0 | 1 | 1 | 1 | 0 | 1 | 1 | 0 | 0 | 20 | | |
| 15 | 1 | 1 | 0 | 0 | 1 | 0 | 0 | 1 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 1 | 1 | 0 | 1 | 1 | 1 | 1 | 0 | 1 | 1 | 0 | 0 | 18 | | |


© 2006 Texas Instruments Inc, Slide 49

Technology for Innovators™

TEXAS INSTRUMENTS

DSSS – Co-existence Performance

- CC2420 - In-band interference
- Power of interferer only 1 dB lower than CC2420 transmitter, NO packet errors
- Narrowband interferer shown as peak in the centre on top of the CC2420 spread spectrum
- A typical FSK receiver requires the desired signal to be 11 dB above interferer

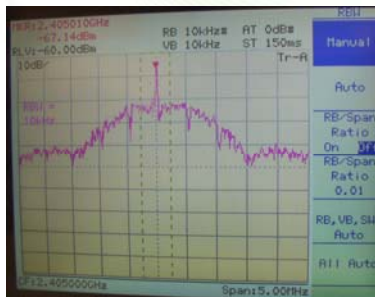


© 2006 Texas Instruments Inc, Slide 50

Technology for Innovators™

TEXAS INSTRUMENTS

Frequency Hopping Spread Spectrum (FHSS)

- Signal broadcast over a seemingly random series of frequencies
- Receiver hops between frequencies in sync with transmitter
- Jamming on one frequency affects only a few bits

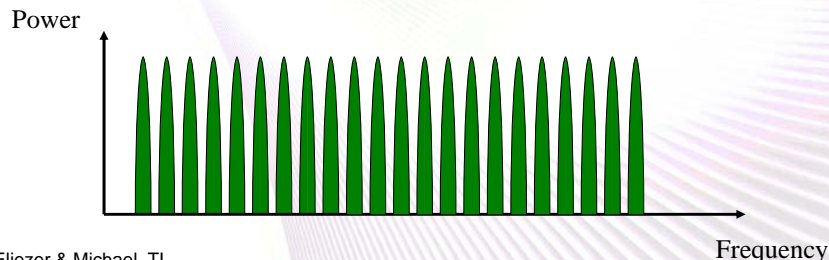

Source: Eliezer & Michael, TI


© 2006 Texas Instruments Inc, Slide 51

Technology for Innovators™

TEXAS INSTRUMENTS

2.4 GHz Devices – Static Frequency Hopping

- Utilise a predetermined set of frequencies with either a repeating hop pattern or a pseudorandom hop pattern, e.g. Bluetooth (versions 1.0 and 1.1)

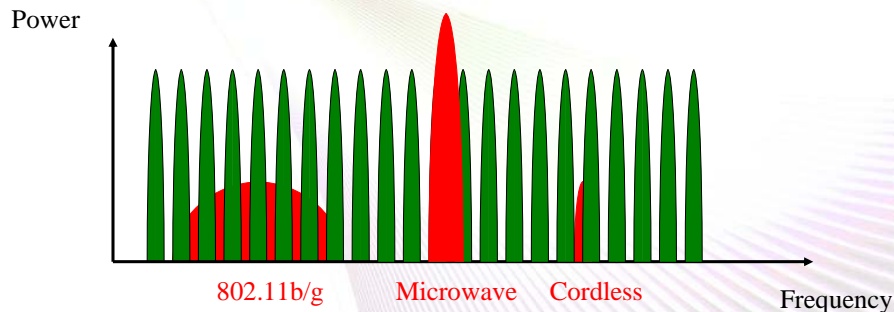

Source: Eliezer & Michael, TI


© 2006 Texas Instruments Inc, Slide 52

Technology for Innovators™

TEXAS INSTRUMENTS

2.4 GHz – Adaptive Frequency Hopping

- Scan the entire frequency band at start-up and restrict usage to frequencies with the lowest energy content. RadioDesk and Bluetooth 1.2 and 2.0 are using AFH.
- Substitute frequencies experiencing interference on the fly.

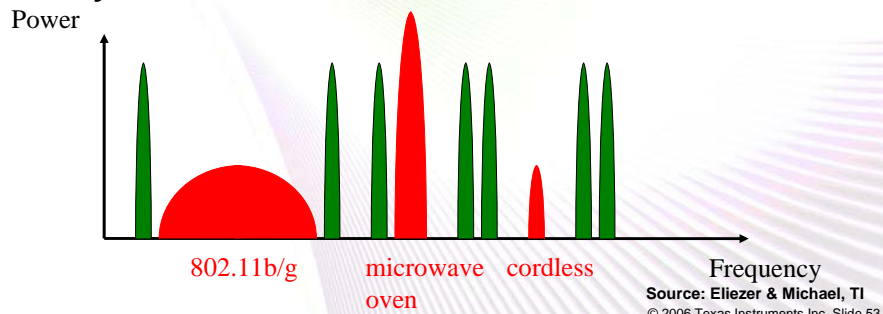


Technology for Innovators™

TEXAS INSTRUMENTS

Frequency Agility

- Frequency agility can be considered an extremely slow hopping frequency hopping system
- In a frequency agile system the frequency is first changed when the link performance is degraded, i.e. when the Packet Error Rate (PER) exceeds a predetermined threshold

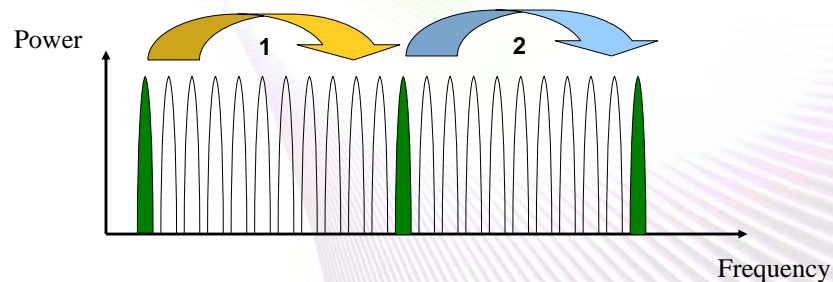

Technology for Innovators™

TEXAS INSTRUMENTS

Agenda

- Basics
- Basic Building Blocks of an RF System
- RF Parameters and RF Measurement Equipment
- Support / getting started

© 2006 Texas Instruments Inc, Slide 55

Technology for Innovators™

TEXAS INSTRUMENTS

Getting Started

- **Define and specify the product**
 - Following a standard or going proprietary?
 - Power consumption
 - Range and regulatory requirements – frequency of operation
 - Data rate
 - RF protocol
 - SW content
 - Analyse test tool and instrumentation needs
 - Cost
- **Compare different vendors – choose RF-IC & tools**
 - Purchase and evaluate EVMs and required tools
 - What SW examples, application notes and documentation are available?
- **Develop, co-operate or outsource?**
 - Sufficient resources available?
 - Do you have the necessary competence in-house?
 - Compliance testing?

© 2006 Texas Instruments Inc, Slide 56

Technology for Innovators™

TEXAS INSTRUMENTS

Support

- **Search for the relevant information**
 - Documentation – e.g. data sheets, user guides and application notes
 - Knowledge bases
 - SW examples
- **Contact your local distributor or TI directly:**
 - Internet:
 - TI Low Power Wireless home page:
 - <http://www.ti.com/lpw>
 - TI MSP430 home page:
 - <http://www.ti.com/msp430>
 - TI Semiconductor Product Information Center Home Page:
 - <http://support.ti.com>
 - TI Semiconductor KnowledgeBase Home Page:
 - <http://support.ti.com/sc/knowledgebase>

© 2006 Texas Instruments Inc, Slide 57

Technology for Innovators™



Summary

- **RF Basics**
 - Available frequency bands
 - RF communication systems
 - Modulation and demodulation
 - Basic building blocks of an RF system – components
 - Extending range
 - Key RF parameters
 - RF measurement equipment
 - Spread spectrum systems – DSSS / FHSS / Frequency Agility
 - Getting started
 - Support

© 2006 Texas Instruments Inc, Slide 58

Technology for Innovators™





Thank you for your attention!

Questions?

© 2006 Texas Instruments Inc, Slide 59

Technology for Innovators™

 **TEXAS INSTRUMENTS**